

Manual quick-change fittings

Brief description

The quick-change fittings, which can be operated manually, permit sensor mounting and removal under process conditions, which means that the liquid cycle concerned, or the main flow, need not be interrupted.

Quick-change fittings are mainly used for pH measurements in closed cycles, or for measurements in the inflow and outflow of water purification plants. The quick-change fitting can also be installed at the side of the tank, which allows the sensor to be removed without previously emptying the tank.


The fitting enables the mounting of one sensor with a Pg 13.5 thread and a mounting length of 120 or 225 mm.

Applications


- measurements in closed liquid cycles, e.g. pH measurement in cooling and water purification plants
- measurements in closed containers and tanks
- final pH check in outflow, if a bypass is not possible
- Type 202822/106-135-... fitting with screw-in thread G1A, for installing one sensor with a Pg 13.5 thread and a mounting length of 225 mm
- Type 202822/105-62-... fitting with screw-in thread G3/4A, for installing one sensor with a Pg 13.5 thread and a mounting length of 120 mm
- Type 202822/613-48-26: fitting with clamp connection, for fitting one sensor with a Pg 13.5 thread and a mounting length of 120 mm

Mounting options

Type 202822/106-135-...

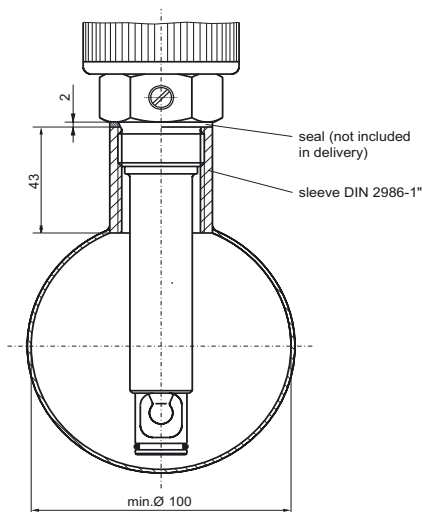

Type 202822/105-062-26

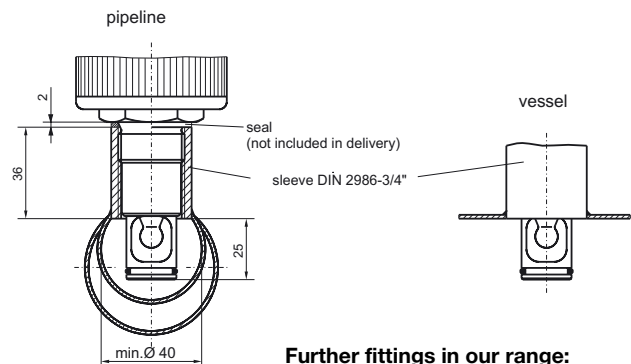


Type 202822/613-.../26

Further fittings in our range:


Fittings type:	Data Sheet
Flow-through fittings	T 202810
Immersion fittings	T 202820
Quick-change fittings	T 202822
Process fittings	T 202825

Dimensions

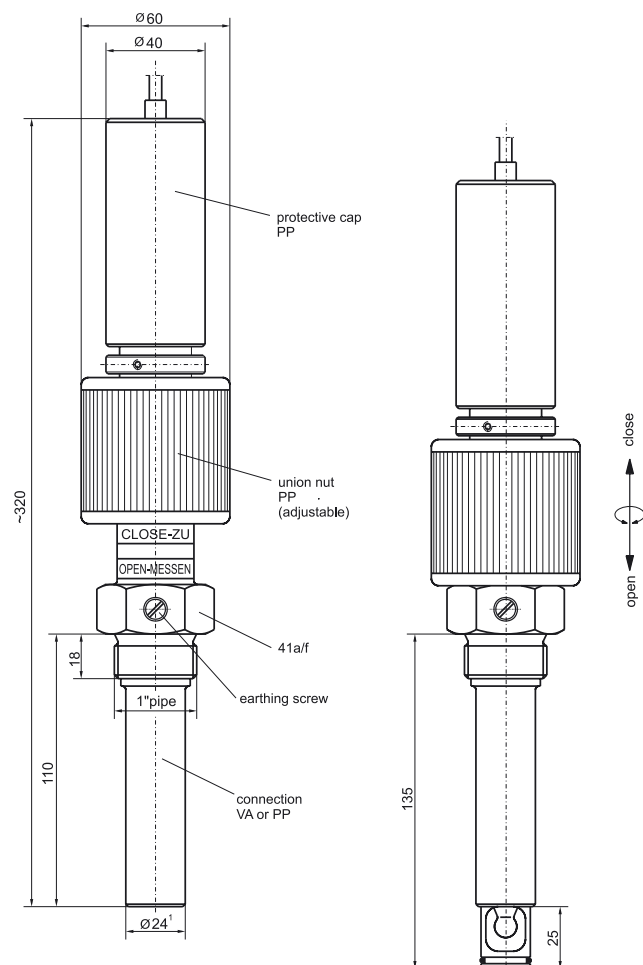


Type 202822/106-135-26, Type 202822/106-135-87

¹ with material PP: 29 mm dia.

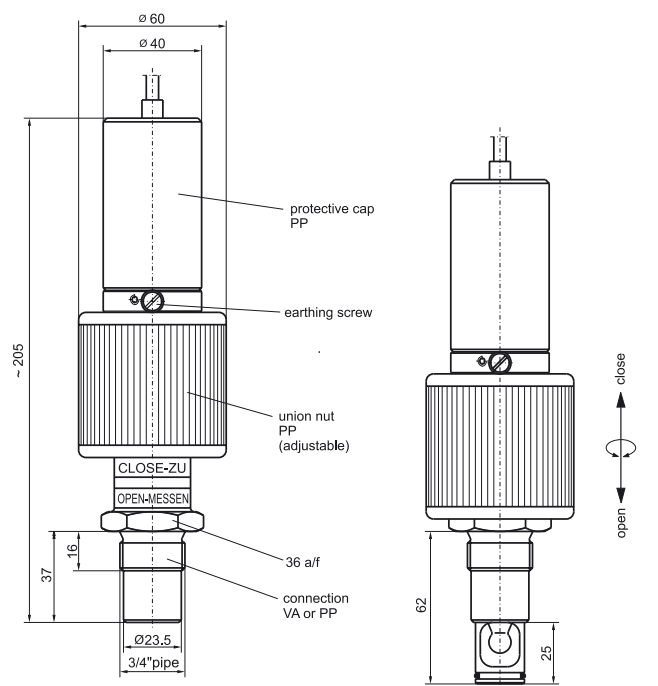

Type 202822/105-062-26, Type 202822/105-062-87

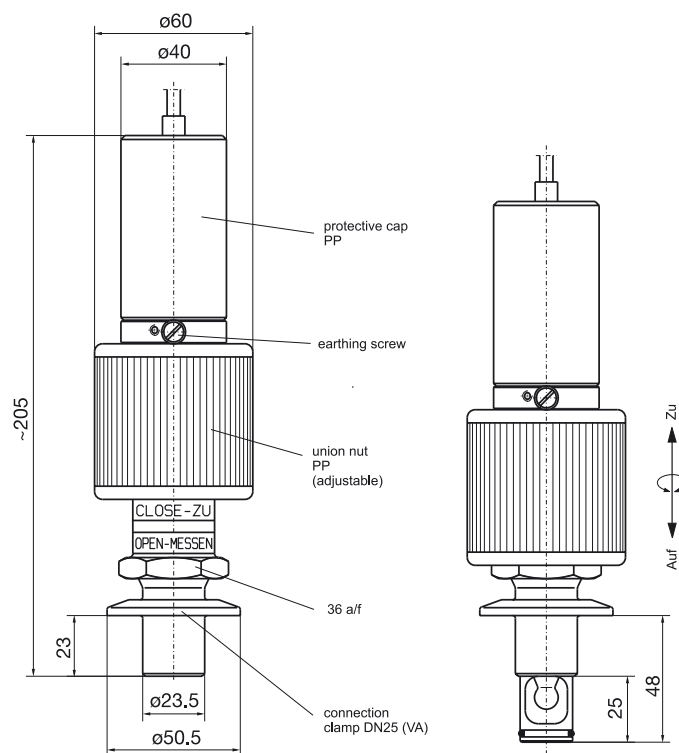

Type 202822/613-048-26

¹ Bei Werkstoff PP Ø 29 mm

Technical data

Parts in contact with medium	stainless steel 1.4571 and FPM or PP and FPM
Permissible temperature ¹	-30 to +135°C stainless steel -10 to + 60°C PP
Safe pressure at 25°C	up to 10bar for stainless steel up to 6bar for PP
Seal	FPM
Protection	IP65
Mounting position	please observe the mounting instructions for the sensor that is used
Electrode holder	Pg13.5 thread A type 202995 impedance converter or a type 202701 two-wire transmitter can be incorporated.
Weight	Type 202822/105-062-260.8 kg Type 202822/106-135-261.0 kg Type 202822/613-048-261.2 kg

Order details

				(1) Basic version
				Manual quick-change fitting
				(2) Process connection
				screw-in thread G3/4A (3/4" pipe)
				for electrodes with a mounting length of 120 mm
				screw-in thread G1A (1" pipe)
				for electrodes with a mounting length of 225 mm
				clamp connection DN25
				for electrodes with a mounting length of 120 mm
				(3) Mounting length
				048 mm
				062 mm
				135 mm
				(4) Material
				parts in contact with medium: stainless steel 1.4571
				polypropylene (PP)

x = available

	(1)	(2)	(3)	(4)
Order code		/	-	-
Order example	202822	/	105	- 062 - 26

The type code is a type designation, not a modular system.

If at all possible, please choose the items listed under "Stock items" or "Production items".

Any free combination of individual code features must be technically checked by us and released.

Please ask us in case of doubt.

Stock items (delivery: 3 working days after receipt of order)

Type

202822/105-062-26

202822/106-135-26

202822/613-048-26

Sales No.

20/00366915

20/00345780

20/00348649

Production items (delivery: 10 working days after receipt of order)

Type

202822/106-135-87

202822/105-062-87

Sales No.

20/00375339

20/00381650

Optional accessories

Description

KCl reservoir, wall-mounted;

to set up an electrolyte bridge or when using KCl-filled electrodes

Spare part kit for manual quick-change fitting (o-ring set and mounting wrench)

Sales No.

20/00060254

20/00420614

¹ Please also note the maximum operating data for the sensor used!
It is **not** possible to remove the sensor at maximum temperature!