

## JUMO dTRANS p30 Pressure Transmitter

### General application

Pressure transmitters are used to measure the relative (gauge) and absolute pressures in liquids or gases. The measuring device for the transmitter is a piezo-resistive element or a thin-film strain gauge. The pressure is converted into an electrical signal.

### Technical data

#### Reference conditions

as per DIN 16086 and IEC 770/5.3

#### Ranges

see order details

#### Overload limit

ranges 0 to 25 bar

3 x full scale

ranges "0 to 40 bar" up to "0 to 250 bar"

2 x full scale

ranges "0 to 400 bar" up to "0 to 600 bar"

1.5 full scale

#### Bursting pressure

ranges 0 to 40 bar

≤ 4 x full scale

ranges "0 to 60 bar" up to "0 to 100 bar"

8 x full scale

ranges "0 to 160 bar" up to "0 to 400 bar"

5 x full scale

ranges 0 to 600 bar

3 x full scale

#### Parts in contact with medium

normally:

Stainless steel 316 Ti/316 L

for range ≥ 60 bar:

Stainless steel 316 Ti/630

#### Output

0 to 20 mA, three-wire,  
burden  $\leq (U_B - 12 \text{ V}) \div 0.02 \text{ A}$

4 to 20 mA, two-wire,  
burden  $\leq (U_B - 10 \text{ V}) \div 0.02 \text{ A}$

4 to 20 mA, three-wire,  
burden  $\leq (U_B - 12 \text{ V}) \div 0.02 \text{ A}$

0.5 to 4.5 V, burden  $\geq 50 \text{ k}\Omega$

1 to 6 V, burden  $\geq 10 \text{ k}\Omega$

0 to 10 V, burden  $\geq 10 \text{ k}\Omega$

#### Burden error

0.5 % max.

#### Zero offset

≤ 0.3% MSP (measuring span)

#### Thermal hysteresis

≤ ± 0.5 % max. MSP

(within compensated temperature range)

≤ ± 1 % max. for ranges

0 to 250 mbar

0 to 400 mbar

0 to 600 mbar

#### Ambient temperature error

within range 0 to 100 °C

(compensated temperature range)

for ranges 250 and 400 mbar

zero: ≤ 0.03 %/°C typical,  
≤ 0.05 %/°C max.

measuring span: ≤ 0.02 %/°C typical,  
≤ 0.04 %/°C max.

for ranges above 600 mbar

zero: ≤ 0.02 %/°C typical,  
≤ 0.04 %/°C max.

span: ≤ 0.02 %/°C typical,  
≤ 0.04 %/°C max.

with basic type extension 024:

zero: ≤ 0.01 %/°C

#### Deviation from characteristic

≤ 0.5 % MSP (limit point adjustment)

with basic type extension 023:

≤ 0.2 % MSP (limit point setting)

#### Hysteresis

≤ 0.1 % MSP

#### Repeatability

≤ 0.05 % MSP

#### Response time

with current output

(output 402, 405 or 406):

≤ 3 msec max.

with voltage output

(output 412, 415, 418 or 420):

≤ 10 msec max.

#### Stability per year

≤ 0.5 % MSP



Type 404366 with terminal box

#### Voltage supply

DC 10 to 30 V (output 4 to 20 mA and 1 to 6 V)

DC 5 V (output 0.5 to 4.5 V)

DC 11.5 to 30 V (output 0 to 10 V)

DC 11.5 to 30 V (output 0(4) to 20 mA)

Ripple: the voltage spikes must not go above or below the values specified for the voltage supply

Requirements: The device must be equipped with an electrical circuit that meets the requirements of EN 61010-1 with regard to "Limited-energy circuits".

max. current drawn: approx. 25 mA

#### Supply voltage error

≤ 0.02 % per V

(nominal supply voltage DC 24 V)

in proportion for voltage supply DC 5 V (±0.5 V)

#### Permissible ambient temperature

-20 to +100 °C

#### Storage temperature

-40 to +125 °C

#### Permissible temperature of medium

-30 to +120 °C

#### Electromagnetic compatibility

EN 61326

interference emission: Class B<sup>1</sup>

noise immunity: industrial requirements

### Mechanical shock

(to IEC 68-2-27)

100 g/1 msec

### Mechanical vibration

(to IEC 68-2-6)

20 g max. at 15 to 2000 Hz

### Protection

with terminal box

IP65 to EN 60529

(connecting cable diameter 5 mm min.,  
7 mm max.)

with connecting cable

IP67 to EN 60529

with circular connector M12 × 1

IP67 to EN 60529

### Housing

Stainless steel 304

Polycarbonate GF

### Pressure connection

see order details;

other connections on request

### Electrical connection

see order details

terminal box to DIN 43650, Form A,

conductor cross-section up to 1.5 mm<sup>2</sup>; or

attached 4-core PVC cable, length 2 m

other lengths on request

### Nominal position

unrestricted

### Weight

200 g

1 The product is suitable for industrial use as well as for households and small businesses.

## Electrical connection


Connection		Terminals		
		Plug	Cable	M12 × 1
Voltage supply DC 10 to 30 V DC 11.5 to 30 V DC 5 V		1 L+ 2 L-	white grey	1+ 3-
Output 1 to 6 V 0 to 10 V 0.5 to 4.5 V		2 - 3 +	grey yellow	3- 4+
Output 4 to 20 mA, two-wire		1 + 2 -	white grey	1+ 3-
		Proportional current 4 to 20 mA in voltage supply		
Output 0(4) to 20 mA, three-wire		2 - 3 +	grey yellow	3- 4+
Protective conductor				
Screen			black	2
Caution: Earth device (pressure connection and/or  or screen				

### Pin assignment M12 × 1




## Dimensions


Electrical connection  
with terminal box  
(61)

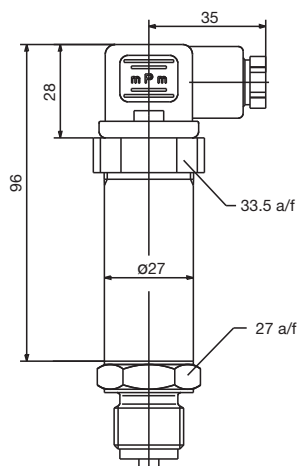


Electrical connection  
with attached cable  
(12)

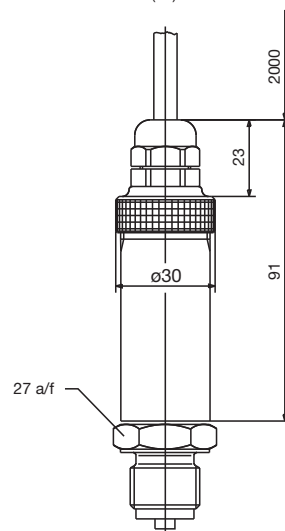


Electrical connection  
with circular connector M12 × 1  
(36)

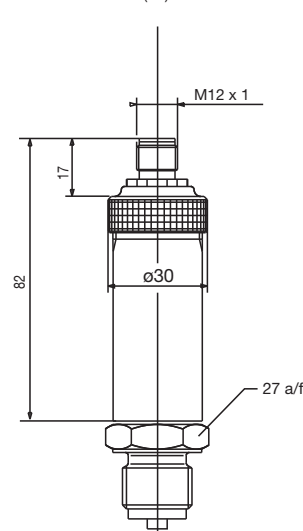

### Process connections, not front-flush

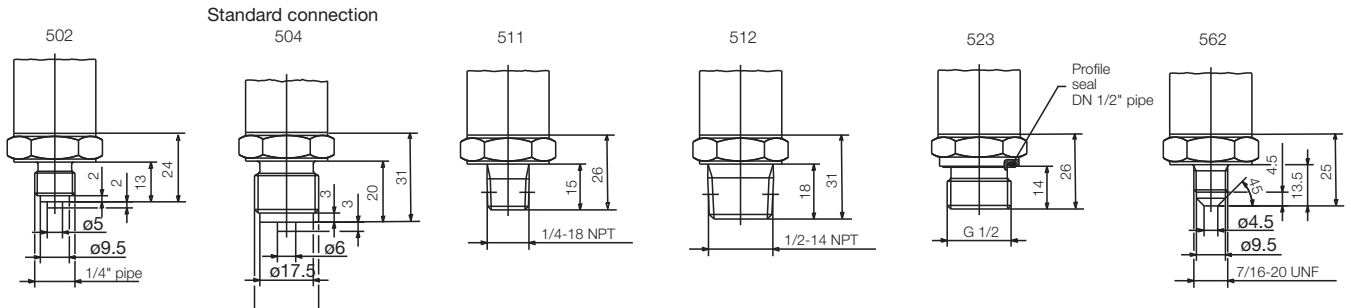


### Process connections, front-flush

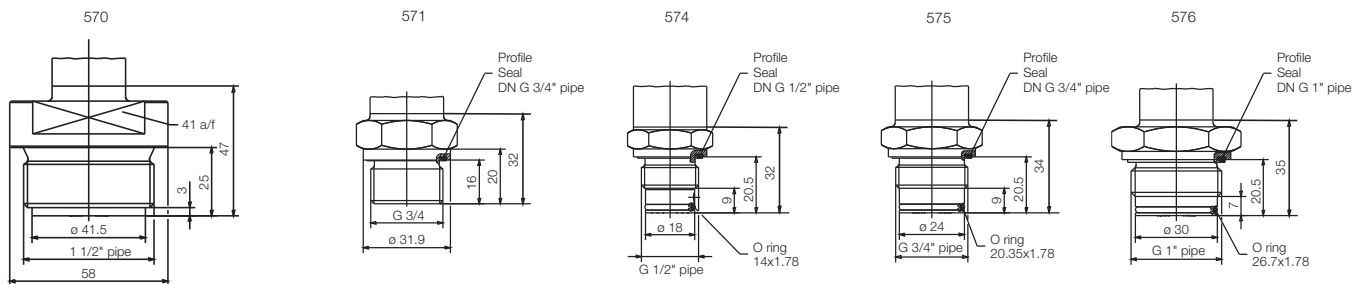

603-607


Cone nipple with slotted union nut to DIN 11851



	DN	$\phi D_1$	$\phi D_2$	$\phi D_3$	$\phi D_4$	L <sub>1</sub>	L <sub>2</sub>
603	20	36.5	30	RD 44x1/6	54	13	
604	25	44	35	RD 52x1/6	63		
605	32	50	41	RD 58x1/6	70	15	21
606	40	56	48	RD 65x1/6	78		
607	50	68.5	61	RD 78x1/6	92	16	22


612-616

Clamp connection to DIN 32676




	DN DIN 32676	DN (Zoll)	Nominal Size ISO 2852	$\phi D_1$	$\phi D_2$
612	20 15		12 12.7 17.2 21.3	27.5	34
613	25 32 40	1" 1.5"	25 33.7 38	43.5	50.5
616	50	2"	40 51	56.5	64

652



997

Suitable for the JUMO PEKA adapter system, see data sheet 409711





## Order details

	<b>(1) Basic type</b>
404366	JUMO dTRANS p30 – Pressure Transmitter
	<b>(2) Basic type extension</b>
000	None
023	reduced deviation of characteristic line <sup>a</sup>
024	reduced influence of ambient temperature <sup>b</sup>
999	Special version
	<b>(3) Input</b>
451	0 to 250 mbar relative pressure
452	0 to 400 mbar relative pressure
453	0 to 600 mbar relative pressure
454	0 to 1 bar relative pressure
455	0 to 1.6 bar relative pressure
456	0 to 2.5 bar relative pressure
457	0 to 4 bar relative pressure
458	0 to 6 bar relative pressure
459	0 to 10 bar relative pressure
460	0 to 16 bar relative pressure
461	0 to 25 bar relative pressure
462	0 to 40 bar relative pressure
463	0 to 60 bar relative pressure
464	0 to 100 bar relative pressure
465	0 to 160 bar relative pressure
466	0 to 250 bar relative pressure
467	0 to 400 bar relative pressure
468	0 to 600 bar relative pressure
478	-1 to 0 bar relative pressure
479	-1 to +0.6 bar relative pressure
480	-1 to +1.5 bar relative pressure
481	-1 to +3 bar relative pressure
482	-1 to +5 bar relative pressure
483	-1 to +9 bar relative pressure
484	-1 to +15 bar relative pressure
485	-1 to +24 bar relative pressure
487	0 to 600 mbar absolute pressure
488	0 to 1 bar absolute pressure
489	0 to 1,6 bar absolute pressure
490	0 to 2,5 bar absolute pressure
491	0 to 4 bar absolute pressure
492	0 to 6 bar absolute pressure
493	0 to 10 bar absolute pressure
494	0 to 16 bar absolute pressure
495	0 to 25 bar absolute pressure
998	Special range absolute pressure
999	Special range relative pressure
	<b>(4) Output</b>
402	0 to 20 mA, three-wire
405	4 to 20 mA, two-wire
406	4 to 20 mA, three-wire
412	0,5 to 4,5 V, three-wire

